

EXITALYA



IP20

IK04



30m.

LED
4000°K

1-3h.



LiFePO₄



Surface, Surface LEDs and Recessed

The Exitalya is the main application of this family.

The design is specially done to have a very compact and flat exit sign.

This original design, with its moving pictogram part, can be installed in any surface: ceiling, walls and inclined roofs.



Surface LEDs



850°



Surface

adaptable

The Exitalya can be installed with interchangeable pictograms with a very easy way to change them.

The Exitalya can also be used in the wall assembly with the same lens than the Walya to proportionate also the wall corridor lighting.



Exitalya can also be installed surface or recessed.

It is supplied with a complete set of pictograms




1 unit x EEP407



1 unit x EEP408



2 units x EEP409



1 unit x EEP406




Surface


versatility



Quick installation



Adaptable 180°

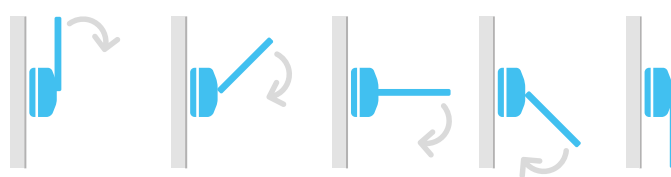



Recessed

180° adaptable

Its specific design makes it a signaling luminaire adaptable to any position on the surface where it is installed: ceiling, wall or sloping ceiling.

The banner is made of a very innovative self-diffusing material that provides a perfect and uniform diffusion of light.







Surface

DIMENSIONS

Surface Ceiling Mounting

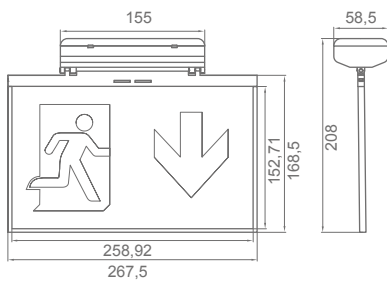

Surface Wall Mounting

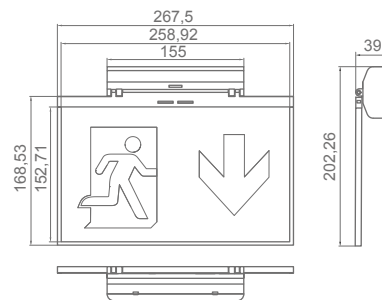



REFERENCES

| View Distance | Type* | Dur | Battery (Units/Ah) | Selftest | Wireless | DALI |
|---------------|-------|-----|--------------------|-------------|--------------|-------------|
| 30 | M | 1 | 3,2V 1,0A/h LFP | LYE3070LXP | LYE3070LDPW | LYE3070LAP |
| 30 | M | 3 | 3,2V 1,5A/h LFP | LYE3070LXP3 | LYE3070LDP3W | LYE3070LAP3 |

*M: Maintained. The luminaire operates from the normal or emergency supply at all material time.
For black version, include "N" at the end of the reference.

VIEWING DISTANCE

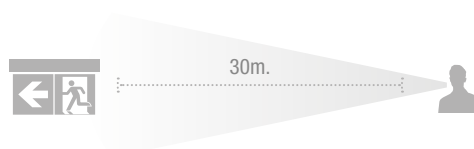

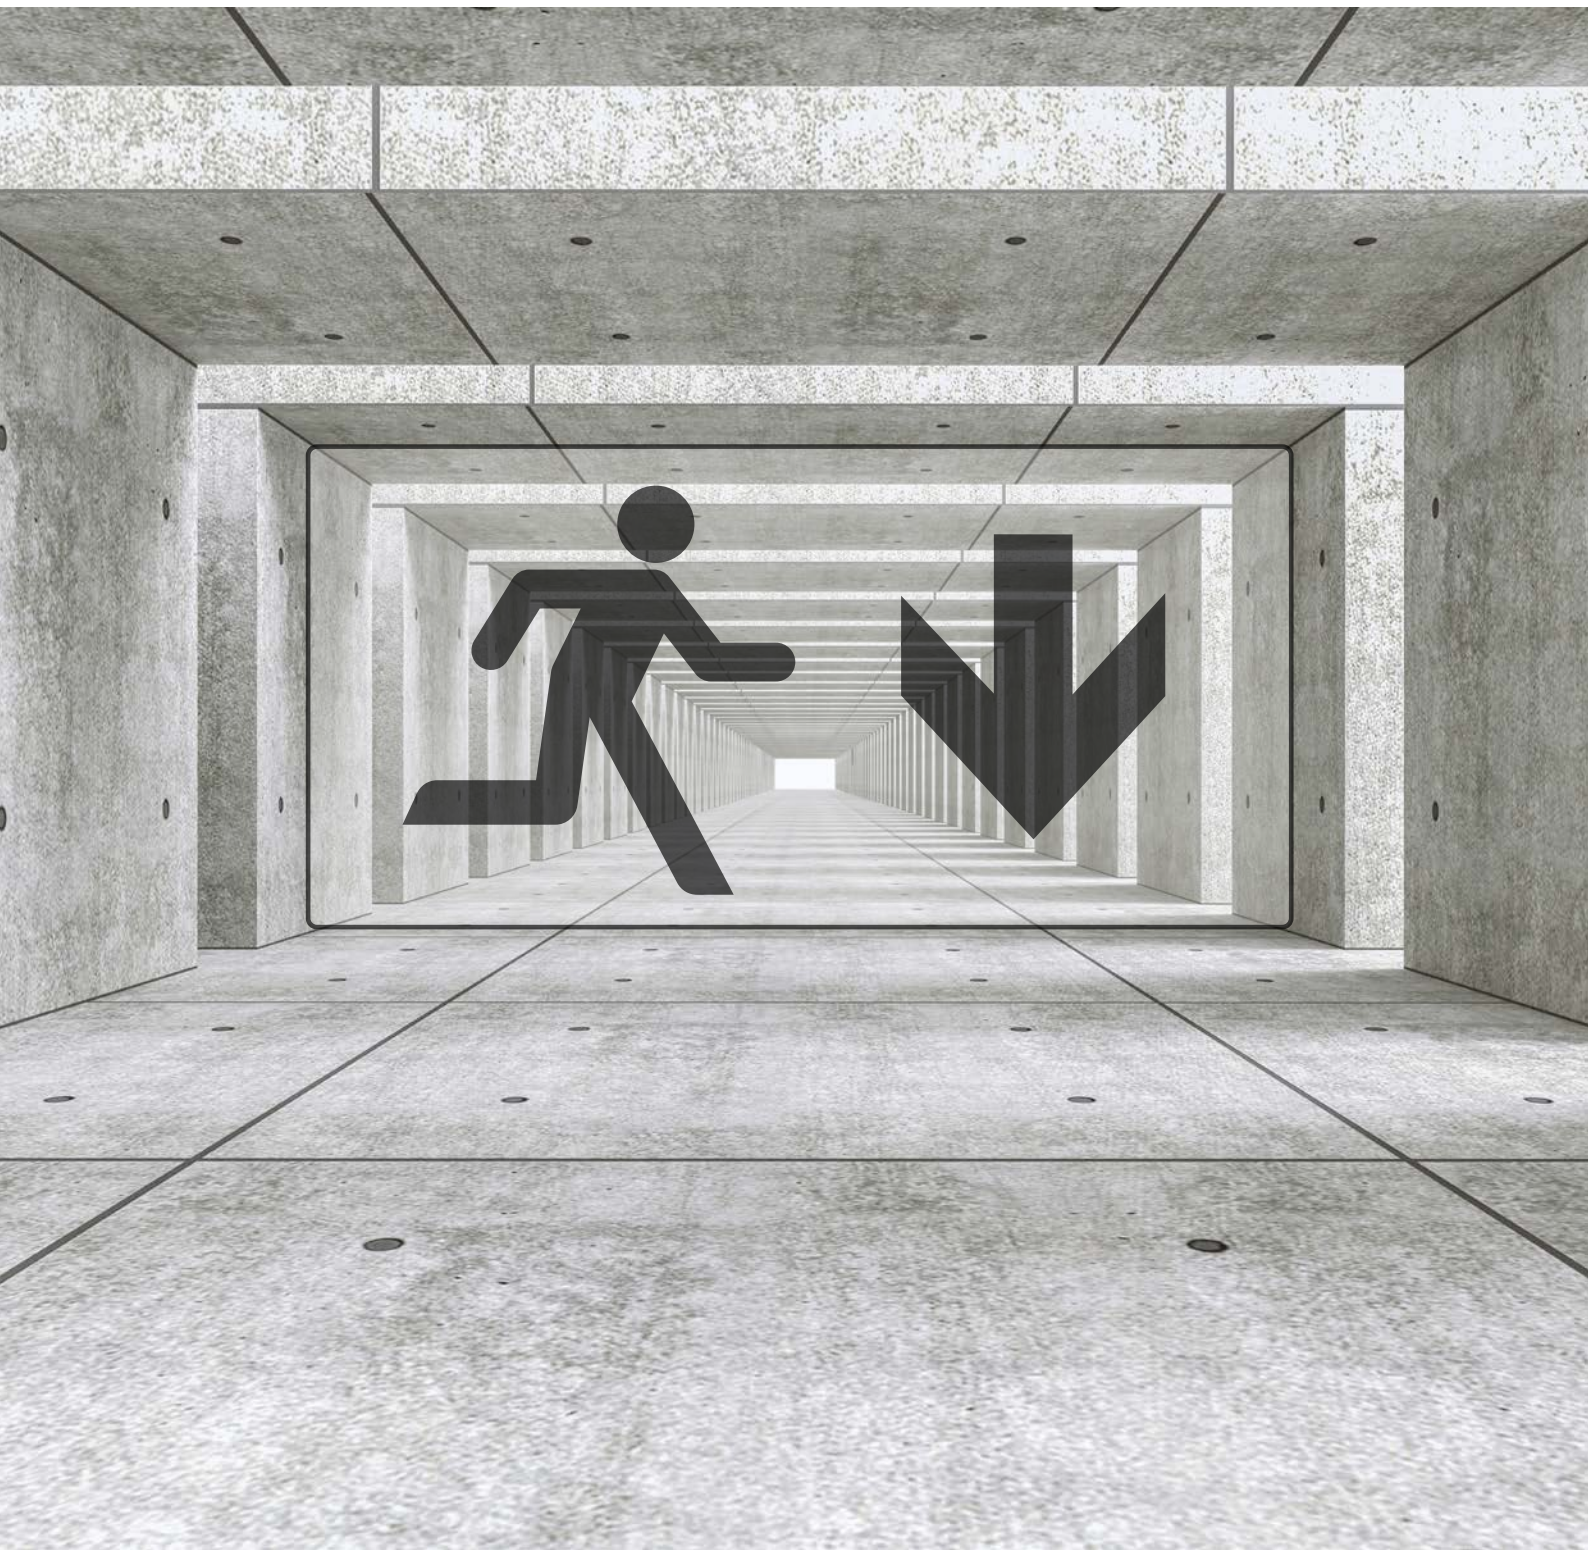




Surface LEDs

DIMENSIONS

Surface Wall Mounting

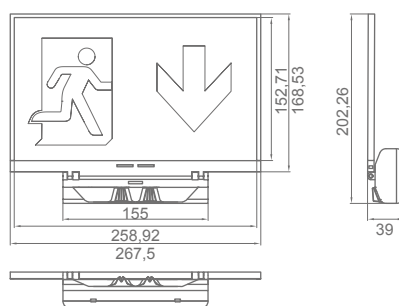

REFERENCES

| lm | View Distance | Type* | Dur | Battery (Units/Ah) | Selftest | Wireless | DALI |
|-----|---------------|-------|-----|--------------------|-------------|--------------|-------------|
| 120 | 30 | M/NM | 1 | 3,2V 1,5A/h LFP | LYE3120LXP | LYE3120LDPW | |
| 120 | 30 | M/NM | 3 | 3,2V 3,0A/h LFP | LYE3120LXP3 | LYE3120LDP3W | |
| 120 | 30 | M | 1 | 3,2V 1,5A/h LFP | | | LYE3120LAP |
| 120 | 30 | M | 3 | 3,2V 3,0A/h LFP | | | LYE3120LAP3 |

*M/NM: Maintained/Non Maintained. With a switch which allows to select Maintained or Non Maintained mode function.

*M: Maintained. The luminaire operates from the normal or emergency supply at all material time.


For black version, include "N" at the end of the reference. Luminous flux decreases by 18% in black colour version.




Recessed

DIMENSIONS

Recessed Wall Mounting

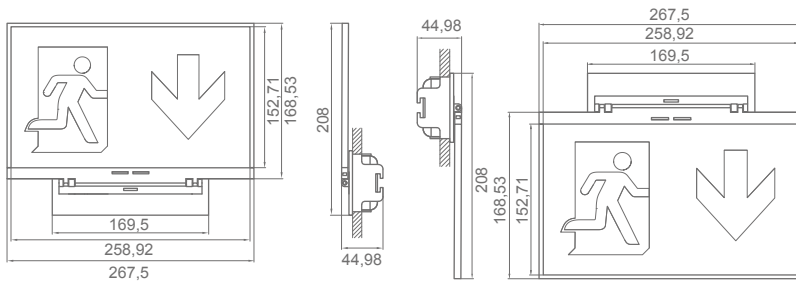

Ceiling Recessed Mounting

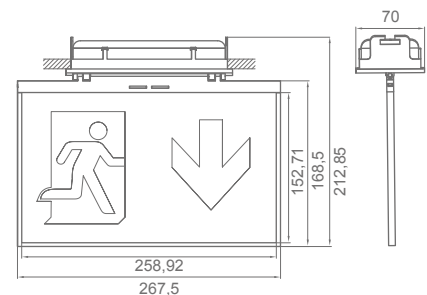

REFERENCES

| View Distance | Type* | Dur | Battery (Units/Ah) | Selftest | Wireless | DALI |
|---------------|-------|-----|--------------------|-------------|--------------|-------------|
| 30 | M | 1 | 3,2V 1,0A/h LFP | LYR3070LXP | LYR3070LDPW | LYR3070LAP |
| 30 | M | 3 | 3,2V 1,5A/h LFP | LYR3070LXP3 | LYR3070LDP3W | LYR3070LAP3 |

*M: Maintained. The luminaire operates from the normal or emergency supply at all material time.
For black version, include "N" at the end of the reference.

EXITALYA RED



Wall Mounting

| Im | View Distance | Type* | Dur | Battery (Units/Ah) | Selftest | Wireless | DALI |
|-----|---------------|-------|-----|--------------------|-------------|--------------|-------------|
| 120 | 30 | M/NM | 1 | 3,2V 1,5A/h LFP | LYE3125LXP | LYE3125LDPW | |
| 120 | 30 | M/NM | 3 | 3,2V 3,0A/h LFP | LYE3125LXP3 | LYE3125LDP3W | |
| 120 | 30 | M | 1 | 3,2V 1,5A/h LFP | | | LYE3125LAP |
| 120 | 30 | M | 3 | 3,2V 3,0A/h LFP | | | LYE3125LAP3 |

*M/NM: Maintained/Non Maintained. With a switch which allows to select Maintained or Non Maintained mode function.

*M: Maintained. The luminaire operates from the normal or emergency supply at all material time.

For black version, include "N" at the end of the reference. Luminous flux decreases by 18% in black colour version.

It is supplied with a complete set of pictograms




1 unit x EEP410



1 unit x EEP411



1 unit x EEP412



1 unit x EEP406

