





- IP65
- IK07
- 1-3h.
- LED 4000°K
- Lm 1500 / 3300
- LiFePO₄
- 30°
-
-
-
-

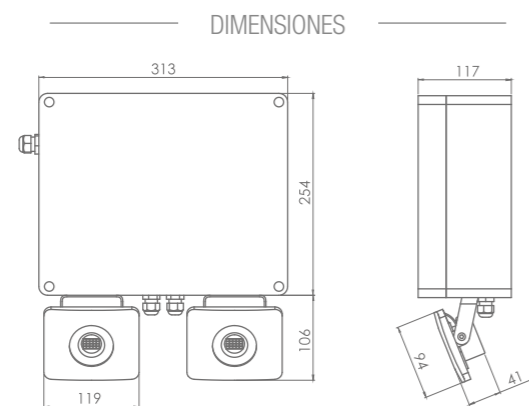

INTERDISTANCIAS

Posición	Altura			
	6	8	10	12
	25,13	30,19	34,45	38,63
	12,34	14,21	15,46	16,35

Interdistancias calculadas con 3.300 lm y E_{min} = 1 lx

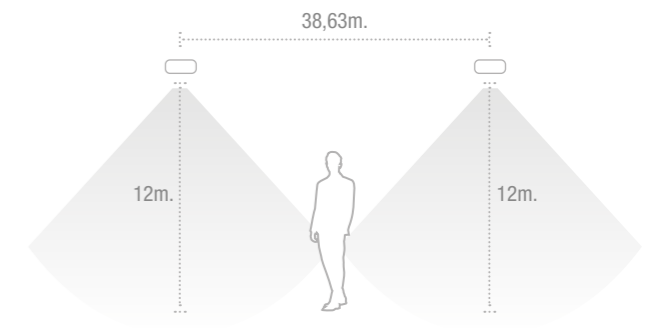

REFERENCIAS

lm	Tipo*	Aut. (h)	Batería	Estándar	PVR (€)	Autotest	PVR (€)	Wireless	PVR (€)
1500	NP	1	12,8V / 3Ah LFP	PME1500LC	315,66	PME1500LX	368,43	PME1500LDW	449,00
1500	NP	3	2 x 12,8V / 3Ah LFP	PME1500LC3	383,02	PME1500LX3	395,39	PME1500LD3W	477,75
3300	NP	1	2 x 12,8V / 3Ah LFP	PME3000LC	379,61	PME3000LX	442,64	PME3000LDW	528,15

BAJAS TEMPERATURAS

lm	Tipo*	Aut. (h)	Batería	Autotest	PVR (€)	Wireless	PVR (€)
3300	NP	1	2 x 12,8V / 3Ah LFP	PME3000LXF	505,68	PME3000LDWF	595,39

*NP: funciona solo en caso de ausencia de red.



CURVAS FOTOMÉTRICAS

