




- IP42
- IK04
- 1h.
- LED 4000°K
- Lm 1500 / 3300
- Ni-Cd
- LiFePO<sub>4</sub>
- 
- 
- 
- 


DIMENSIONES

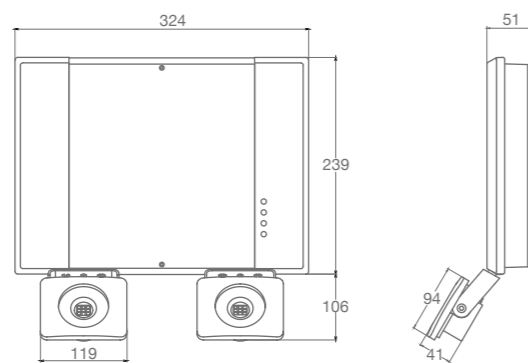

INTERDISTANCIAS

Posición	Altura			
	6	8	10	12
	21,69	25,88	29,07	31,58
	10,00	10,99	11,57	11,78

Interdistancias calculadas con 1.500 lm y E<sub>min</sub> = 1 lx

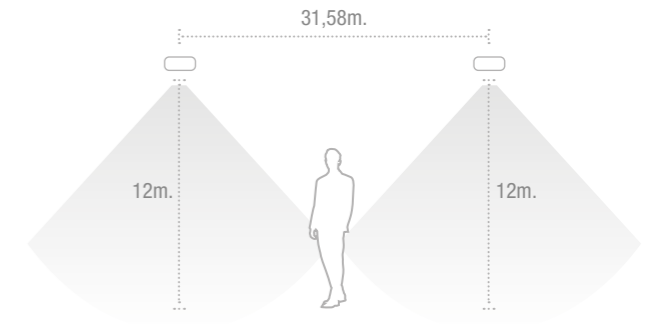

REFERENCIAS

lm	Tipo*	Aut. (h)	Baterías (Uds./Ah)	Estándar	PVR (€)	Autotest	PVR (€)	Wireless	PVR (€)
1500	NP	1	12,8V / 3Ah LFP	PFL1500LC	253,74	PFL1500LX	279,18	PFL1500LDW	342,60
3300	NP	1	2 x 12,8V / 3Ah LFP	PFL3000LC	319,92	PFL3000LX	339,00	PFL3000LDW	375,20

\*NP: funciona solo en caso de ausencia de red.



CURVAS FOTOMÉTRICAS

