

# VOLTA

*Nahtrang Studio*

<sup>(ENG)</sup> Delicate arches and simple cylinders in a family of lights which can be used singly or in clusters of brilliance. Aluminium heads with acrylic diffusers. <sup>(ESP)</sup> Delicados arcos y simples cilindros forman esta familia de lámparas individuales o combinadas en grupos. Pantallas de aluminio con difusores de metacrilato.







17 / Private residence by @bocconi\_projects 18 / Private residence by @estudioromeomontoya 20 / Private residence by @kalasaconcept 21 / Restaurante Escena by @peanut\_design\_studio



### T-3535-W

LED 2x6,2W  
(2700K / Ang. 45°  
>90 CRI / 350mA) 230V  
Typ\* 2x725 lumens  
Dimmable Triac

#### Finishes

- 26 BLK (Body)
  - 26 BLK (Head)
  - 61 S GLD (Head)
- 71 WH (Body)
  - 71 WH (Head)

### T-3536-W

LED 3x6,2W  
(2700K / Ang. 45°  
>90 CRI / 350mA) 230V  
Typ\* 3x725 lumens  
Dimmable Triac

#### Finishes

- 26 BLK (Body)
  - 26 BLK (Head)
  - 61 S GLD (Head)
- 71 WH (Body)
  - 71 WH (Head)

#### Additional

15° angle optic lens conversion kit.  
We offer custom finishes, sizes, and alternate lamping for projects.

*Photographs may show non-standard products.*




### T-3535-M

LED 2x6,2W  
(3000K / Ang. 45°  
>90 CRI / 350mA) 230V  
Typ\* 2x763 lumens  
Dimmable Triac

#### Finishes

- 26 BLK (Body)
  - 26 BLK (Head)
  - 61 S GLD (Head)
- 71 WH (Body)
  - 71 WH (Head)

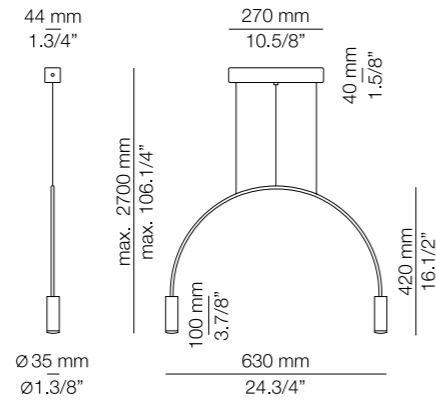


### T-3536-M

LED 3x6,2W  
(3000K / Ang. 45°  
>90 CRI / 350mA) 230V  
Typ\* 3x763 lumens  
Dimmable Triac

#### Finishes

- 26 BLK (Body)
  - 26 BLK (Head)
  - 61 S GLD (Head)
- 71 WH (Body)
  - 71 WH (Head)

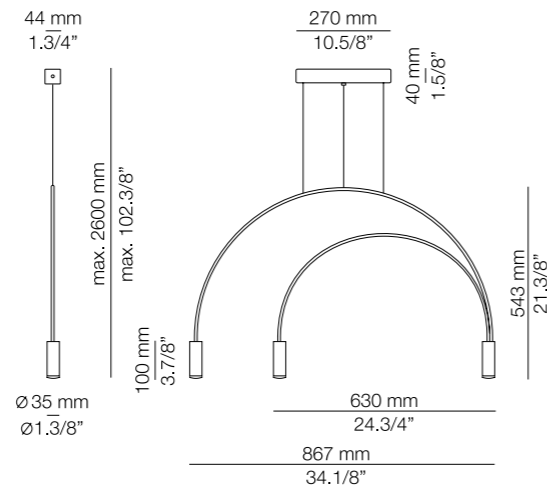

#### Recessed option

Recessed canopy with remote driver




Private residence by @casasinhhaus




# VOLTA · SUSPENSION

## LINEAR CANOPY


VOLTA L73.2D

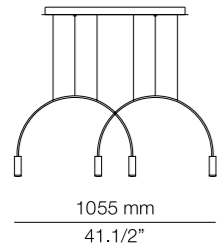


VOLTA L78.1D1T




VOLTA L92.2T

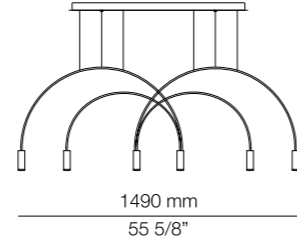


VOLTA L165.3D

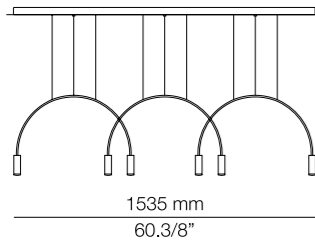

VOLTA L165.1D2T

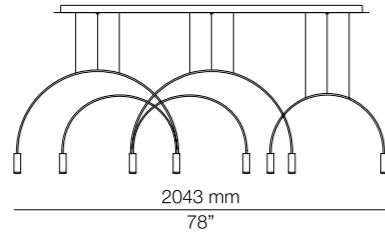


VOLTA L165.3D2T

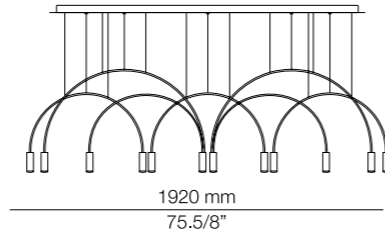


## ROUND CANOPY

VOLTA R100.5D

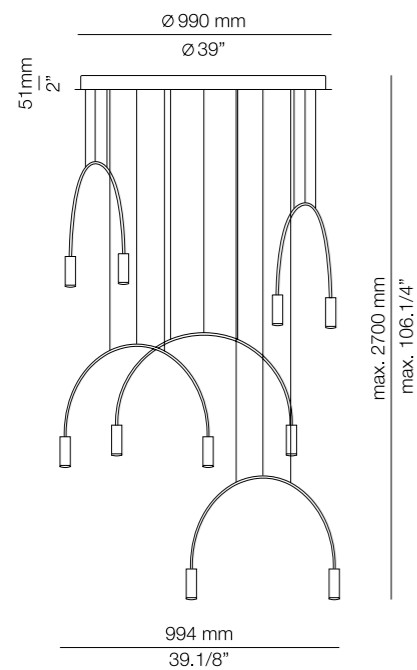

VOLTA R70.3D

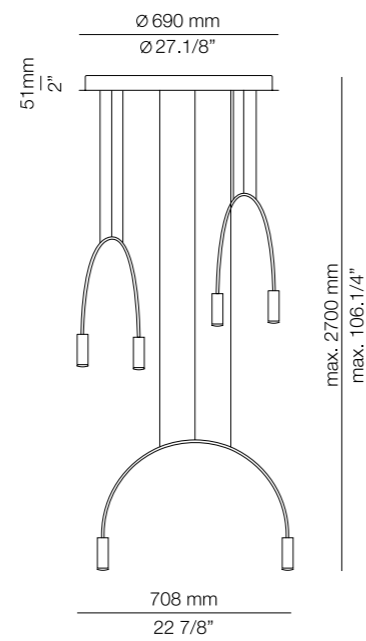

Hotel @niche\_hotel\_athens by Maira Ridaki





## A-3530-W

LED 6,2W  
(2700K / Ang. 45° / >90 CRI  
350mA) / 100V - 240V  
Typ\* 725 lumens  
Non Dimmable

### Finishes

- 26 BLK (Body)
  - 26 BLK (Head)
  - 61 S GLD (Head)
- 71 WH (Body)
  - 71 WH (Head)

## A-3531-W

LED 6,2W  
(2700K / Ang. 45° / >90 CRI  
350mA) / 100V - 240V  
Typ\* 725 lumens  
Non Dimmable

### Finishes

- 26 BLK (Body)
  - 26 BLK (Head)
  - 61 S GLD (Head)
- 71 WH (Body)
  - 71 WH (Head)

### Additional

15° angle optic lens conversion kit.  
We offer custom finishes, sizes,  
and alternate lamping for projects.  
*Photographs may show non-standard products.*




## A-3530-M

LED 6,2W  
(3000K / Ang. 45° / >90 CRI  
350mA) / 100V - 240V  
Typ\* 763 lumens  
Non Dimmable

### Finishes

- 26 BLK (Body)
  - 26 BLK (Head)
  - 61 S GLD (Head)
- 71 WH (Body)
  - 71 WH (Head)

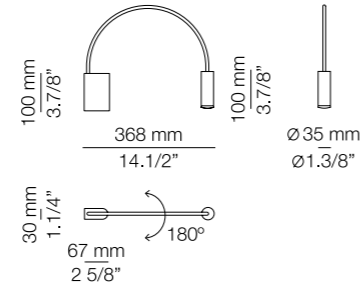


## A-3531-M


LED 6,2W  
(3000K / Ang. 45° / >90 CRI  
350mA) / 100V - 240V  
Typ\* 763 lumens  
Non Dimmable

### Finishes

- 26 BLK (Body)
  - 26 BLK (Head)
  - 61 S GLD (Head)
- 71 WH (Body)
  - 71 WH (Head)

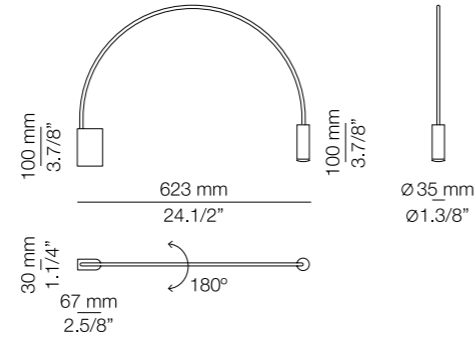

### Cord&Plug accessory



26 / Private residence by @chapilo.design 29 / Private residence by @fabiolantolino



T-3534-W

LED 6,2W  
 (2700K / Ang. 45° / >90 CRI  
 350mA) / 100V - 240V  
 Typ\* 725 lumens  
 Non Dimmable  
 (dimmable upon request)  
 Compositions are dimmable

Finishes

- 26 BLK (Body)
  - 26 BLK (Head)
  - 61 S GLD (Head)
- 71 WH (Body)
  - 71 WH (Head)

Additional

15° angle optic lens  
 conversion kit.  
 We offer custom finishes, sizes,  
 and alternate lamping for projects.

*Photographs may show non-standard products.*




T-3534-M

LED 6,2W  
 (3000K / Ang. 45° / >90 CRI  
 350mA) / 100V - 240V  
 Typ\* 763 lumens  
 Non Dimmable  
 (dimmable upon request)  
 Compositions are dimmable


Finishes

- 26 BLK (Body)
  - 26 BLK (Head)
  - 61 S GLD (Head)
- 71 WH (Body)
  - 71 WH (Head)

Recessed option

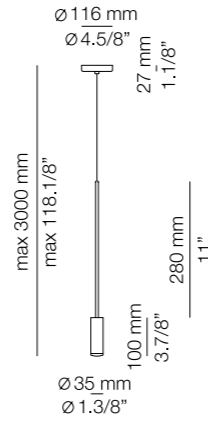

VOLTA · SUSPENSION · COMPOSITIONS

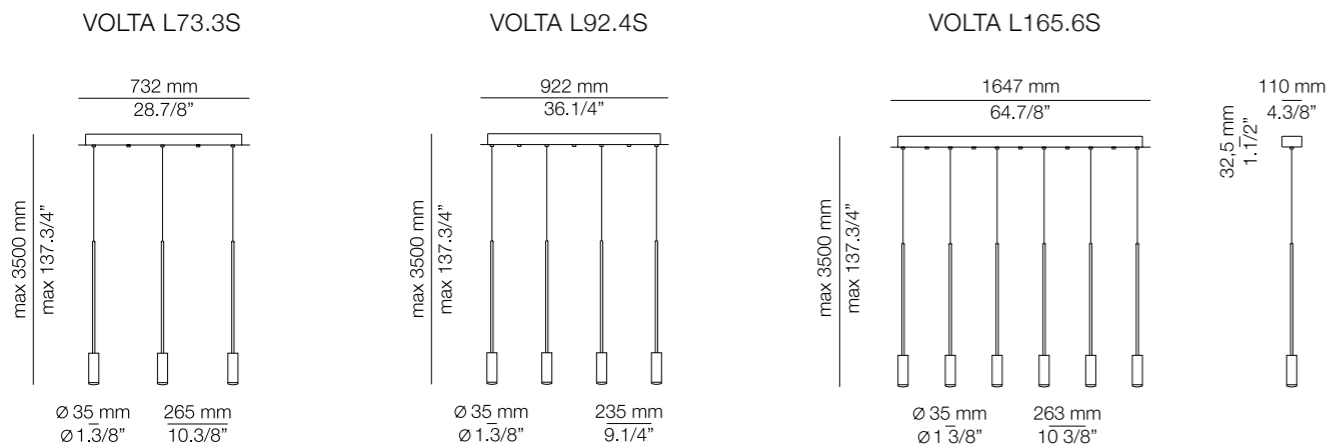

Private residence by @studio\_erez\_hyatt







32 / Catalogue @bassols\_1790 33 / Private residence by BNU Nanjing



## M-3537-W

LED 6,2W  
(2700K / Ang. 45°  
>90 CRI / 350mA) / 230V  
Typ\* 725 lumens  
On/Off Switch

### Finishes

- 26 BLK (Body)
  - 26 BLK (Head)
  - 61 S GLD (Head)
- 71 WH (Body)
  - 71 WH (Head)

## p-3538-W

LED 6,2W  
(2700K / Ang. 45°  
>90 CRI / 350mA) / 230V  
Typ\* 725 lumens  
Push button dimmer  
on the head

### Finishes

- 26 BLK (Body)
  - 26 BLK (Head)
  - 61 S GLD (Head)
- 71 WH (Body)
  - 71 WH (Head)

### Additional

15° angle optic lens conversion kit.  
We offer custom finishes, sizes,  
and alternate lamping for projects.

*Photographs may show non-standard products.*




## M-3537-M

LED 6,2W  
(3000K / Ang. 45°  
>90 CRI / 350mA) / 230V  
Typ\* 763 lumens  
On/Off Switch

### Finishes

- 26 BLK (Body)
  - 26 BLK (Head)
  - 61 S GLD (Head)
- 71 WH (Body)
  - 71 WH (Head)

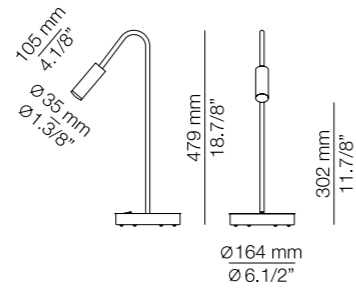


## p-3538-M

LED 6,2W  
(3000K / Ang. 45°  
>90 CRI / 350mA) / 230V  
Typ\* 763 lumens  
Push button dimmer  
on the head

### Finishes

- 26 BLK (Body)
  - 26 BLK (Head)
  - 61 S GLD (Head)
- 71 WH (Body)
  - 71 WH (Head)

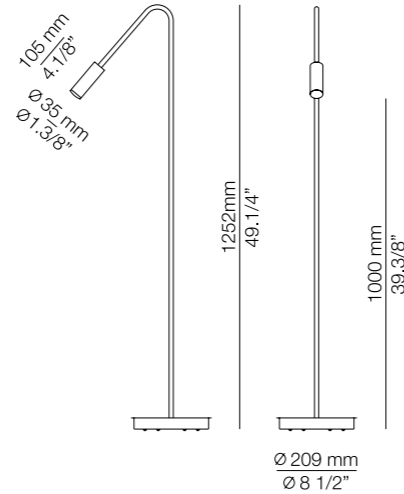

Matrix Hotel by @dialogdesign



## VOLTA · SPOTLIGHT

(ENG) Advanced engineering gives Volta's elegant and versatile design a 330° swivel for a line of spotlights that directs light with precision. (ESP) La colección Volta ofrece su versión más técnico-decorativa con una fina línea de focos con una rótula que permite hasta 330° de movimiento. El foco individual permite una iluminación puntual con un diseño elegante.




A-3533S-W

LED 6,2W  
(2700K / Ang. 15° / >90 CRI  
350mA) / 100V - 240V  
Typ\* 725 lumens  
Non Dimmable

A-3533S-M

LED 6,2W  
(3000K / Ang. 15° / >90 CRI  
350mA) / 100V - 240V  
Typ\* 763 lumens  
Non Dimmable



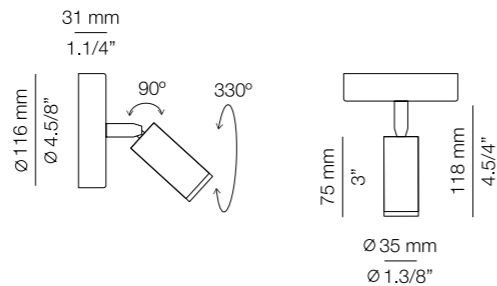


A-3533R-W

LED 6,2W  
(2700K / Ang. 15° / >90 CRI  
350mA) / 230V  
Typ\* 725 lumens  
Dimmable Triac

A-3533R-M

LED 6,2W  
(3000K / Ang. 15° / >90 CRI  
350mA) / 230V  
Typ\* 763 lumens  
Dimmable Triac

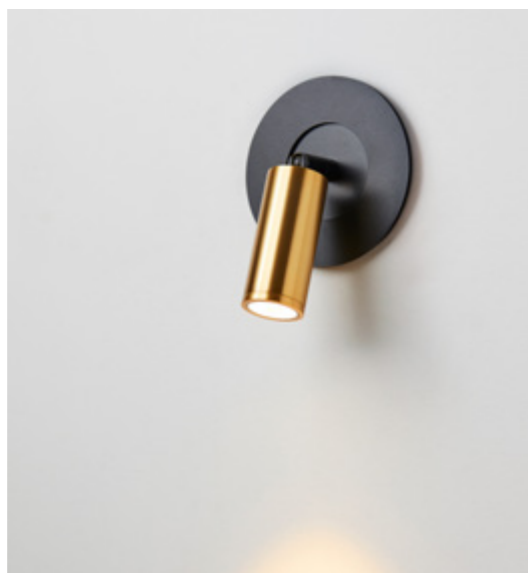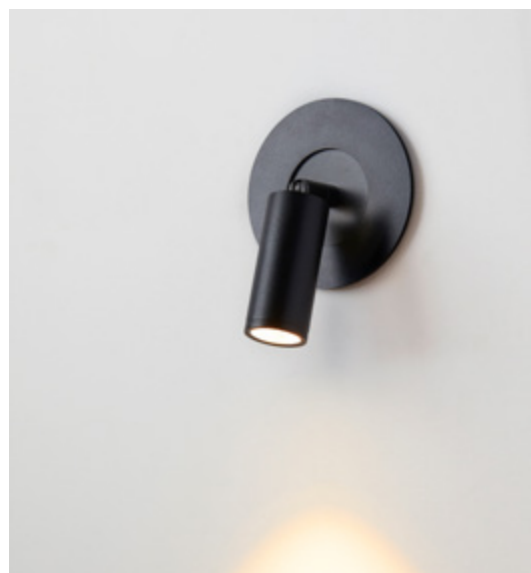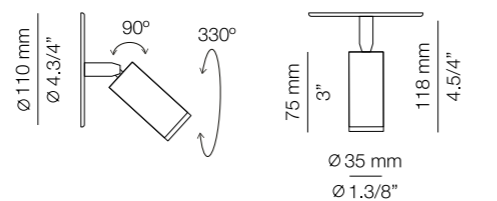


T-3532-W

LED 6,2W  
(2700K / Ang. 15° / >90 CRI  
350mA) / 230V  
Typ\* 725 lumens  
Dimmable Triac

T-3532-M

LED 6,2W  
(3000K / Ang. 15° / >90 CRI  
350mA) / 230V  
Typ\* 763 lumens  
Dimmable Triac

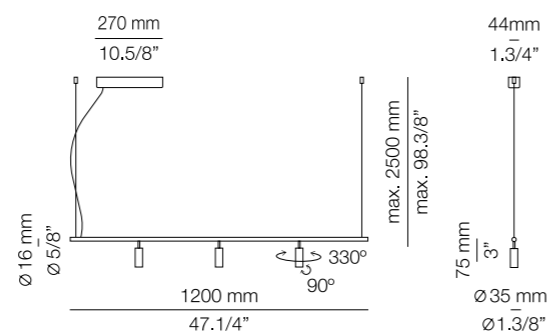


Finishes

- 26 BLK (Body)
- 26 BLK (Head)
- 61 S GLD (Head)
- 71 WH (Body)
- 71 WH (Head)

Additional

45° angle acrylic optic lens included.  
We offer custom finishes, sizes, and alternate lamping for projects.  
*Photographs may show non-standard products.*

Recessed option

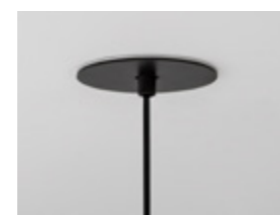

CE Ⓢ IP 20 960°

